


Ran[®] 1" (25.4 mm) 316 Stainless Steel Body Diaphragm Pump



Technical Specifications

Pump Code	D25-SC1-2	Pump Housing Material	316 Stainless Steel
Max. Flow Rate	170 lpm	Center Section Material	Polypropylene
Max. Pump Speed	280 cpm	Max. Size Pumpable Solids	3 mm
Displacement per cycle	0.61 liter	Max. Suction Lift	9.5 m (Wet) 5 m (Dry)
Fluid Inlet- Outlet Size	1" NPT	Max. Operating Temperature	104 °C
Air Inlet Size	3/8"	Sound Level	75 dBA (at 5 bar)
Max. Fluid Working Pressure	8 bar	Diaphragm Material	PTFE
Max. Air Consumption (at 5 bar)	1 m ³ /min	Check-Valve Material	PTFE
Ratio	1:1	Weight	17 kg

Performance Curves

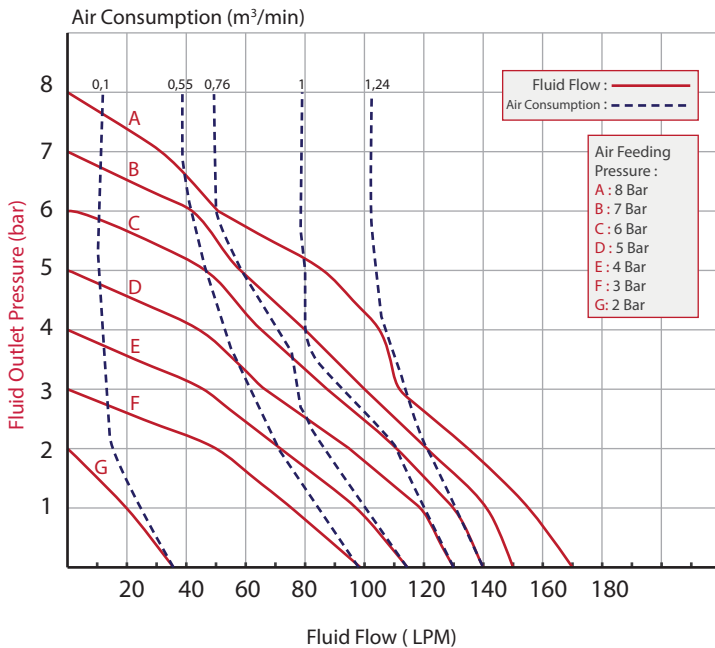

Made in Turkey



Test Conditions: All tests are made with water. Suction hose submerged in the fluid. Muffler not used. All the values are shown are approximate and not binding.

Example: To pump 80 lpm against a discharge pressure of 4 bar, requires 7 bar and 1 m³/min air consumption.

Dimensions

A	268
B	323
C	210
D	410
E	208
F	120
G	10.5

All dimensions are in mm.

